



## FOXAIR SERIES MOBILE HVAC

# FoxAir MAX

## 59,000 BTU

The FoxCart's FoxAir MAX Series is a portable HVAC unit capable of delivering 59,000 BTU of refrigerated air for pre-cooling or maintenance operations, with a minimum ambient temperature of 35°F (1.67°C). With an additional 20 kW 'Heater' option, the FoxAir MAX can create that comfortable climate year round.

### STANDARD FEATURES

SEALED REFRIGERANT SYSTEM FOR UNMATCHED RELIABILITY AND PERFORMANCE  
1820 CFM AIR MOVEMENT SYSTEM  
20" x 25" x 2" AIR FILTER  
QUICK-CONNECT COLLAR FOR QUICK AND EASY CONNECTION OF AIR DELIVERY HOSE  
FOXAIR MAX IS MOUNTED ON A TRAILER WITH OVERSIZED 205/65-14 TIRES (5MPH TOW)

### INPUT

VOLTAGE RANGE	208 - 230 VRMS, 1Ø OR 3Ø 430 - 480, 3Ø 540 - 575, 3Ø 2 WIRE, PLUS SAFETY GROUND
FREQUENCY	60Hz ± 10%
SAFETY DISCONNECT	CIRCUIT BREAKER ON / OFF

### INDICATORS

MIN AMBIENT TEMP	35°F
------------------	------

### OPERATING CONDITIONS

MODES	COOL OR FAN ONLY
-------	------------------

### OPTIONS AVAILABLE

20kW HEATER  
AIR DELIVERY HOSE (12" LAY FLAT DUCT - 25 FOOT)  
50 FOOT (REQUIRES EXTENSION COUPLING)  
DRAIN HOSE KIT - 50 OR 100 FOOT (SPECIFY)  
INTEGRAL FREEZE PROTECTION SWITCH PREVENTS CONDENSER COIL FREEZE-UP  
50, 100, OR 150 FOOT INPUT POWER CABLE (PIGTAIL - SPECIFY)  
CONDENSATION VU-THRU TANK - 21 GALLONS  
CONVENIENCE OUTLET - 120 VAC (SPECIFY VOLTAGE)

### CAPACITY RATINGS (OUTPUT)

COOLING BTU / TONS	59,000 / 5.00
HEATING (OPTIONAL)	20 kW
AIRFLOW	1820 CFM
ENERGY EFFICIENCY RATINGS	SEER - 14 EER - 11.5

### ENVIRONMENTAL

MOISTURE PROTECTION	IP24
AIR FILTER	20" x 25" x 2" (QTY 2)
SOUND LEVEL	78 dBA

This product was manufactured in a plant whose quality management system is registered to ISO 9001:2015.



Unitron Power Systems • 10925 Miller Rd • Dallas, TX 75238  
Sales: +1-800-527-1279 • Service: +1-214-343-7597 • Fax: +1-214-341-2099  
info@UnitronLP.com • www.UnitronLP.com



## FOXAIR MAX

WEIGHT (WEIGHT VARIES WITH OPTIONS)

1,155LBS (2,934KG)

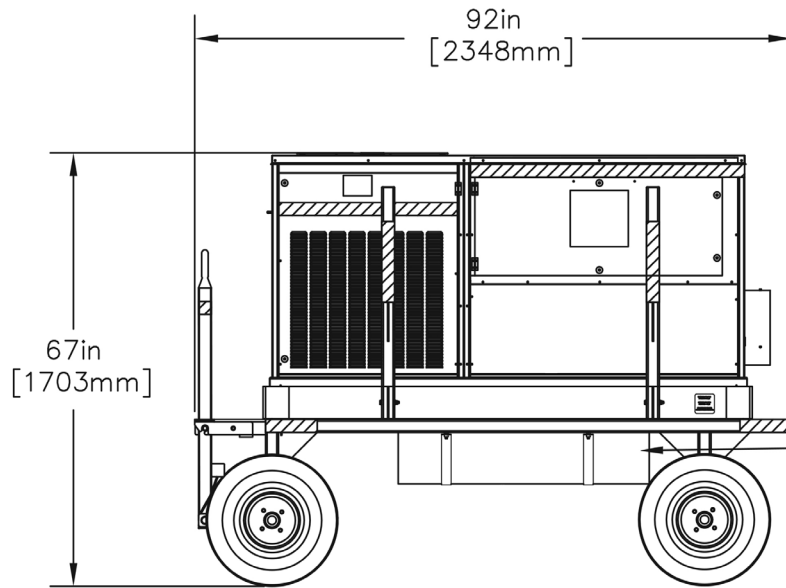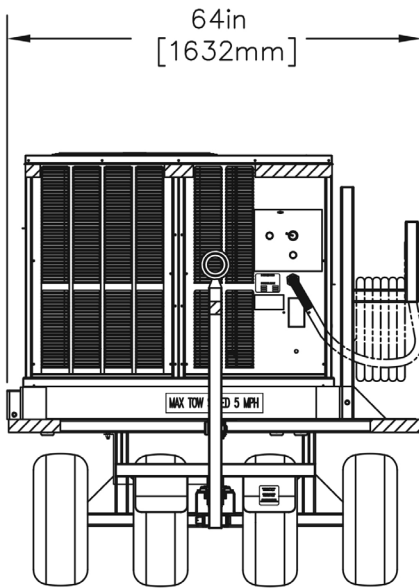

OPTIONAL  
TANK KIT

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

REV M

This product was manufactured in a plant  
whose quality management system is  
registered to ISO 9001:2015.

Unitron Power Systems • 10925 Miller Rd • Dallas, TX 75238  
Sales: +1-800-527-1279 • Service: +1-214-343-7597 • Fax: +1-214-341-2099  
info@UnitronLP.com • www.UnitronLP.com